



DOSTUPNO KAO

VL001GZ bez akumulatora, punjača i letve

POSEBNOSTI PROIZVODA


Smanjuje neravnine
Vibraciona letva sabija agregat i ravnomerno dovodi cementnu pastu na površinu, čime pomaže da se smanje razlike u čvrstoći i pojava pukotina.

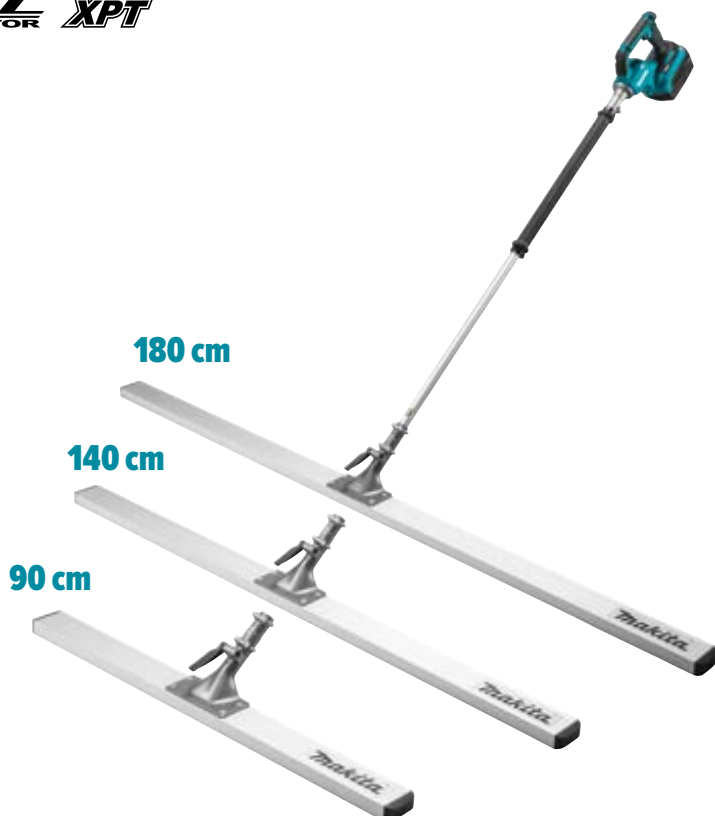

Zaštita od prodiranja betona
Poklopci akumulatora i prekidača sprečavaju nakupljanje betona na alatu i na taj način štite osetljive komponente i održavaju pouzdane performanse.



Jednostavno održavanje
Letve se mogu ukloniti bez alata, što ih čini lakim za čišćenje odvojeno od alata.



Dugačak gumeni rukohvat
Zahvaljujući prednjem rukohvatu velikih dimenzija korisnik može da prilagodi položaj ruke za udoban radni položaj.


BUKA I VIBRACIJE

Nivo zvučnog pritiska: **85 dB(A)**, Nivo zvučne snage: **91 dB(A)**, Nivo vibracija: **8,6 m/s²**


KOMPATIBILNOST

Preporučeno: **BL4020, BL4025, BL4040/F, BL4050F, BL4080F/H, PDC1200, PDC1500**

POGODNOSTI ZA KORISNIKE

- Dostupne su tri varijante letvi nivelatora za različite veličine gradilišta i primene, od betoniranja na otvorenom do temelja stambenih objekata.
- Kontrola konstantne brzine održava stabilne vibracije čak i pri niskim nivoima napunjenosti akumulatora.
- Mala težina smanjuje zamor operatera i naprezanje tokom rada.


TEHNIČKE SPECIFIKACIJE

Napon akumulatora	40 V max XGT
Vibracije u minuti	11.000 min ⁻¹
Radna širina	90 / 140 / 180 cm
Dimenzije (D×Š×V)* ¹	1562 x 935–1.836 x 258 mm
Težina* ¹	5,0 kg

*¹Sa akumulatorom BL4020

PRIBOR

Letva za nivelisanje
betona – 90 cm
1917D5-2



Letva za nivelisanje
betona – 140 cm
1917D4-4



Letva za nivelisanje
betona – 180 cm
1917D3-6



Zaštita za
akumulator BL4050F,
BL4080F/H
1910J1-0



Zaštita za ledne
akumatore PDC1200,
PDC1500
1910J4-4


POVEZANI PROIZVODI


40 V max XGT
VR001G
Akumulatorski
vibrator za beton



40 V max XGT
UT002G
Akumulatorski mešač



40 V max XGT
TR001G
Akumulatorski
alat za vezivanje
armature



40 V max XGT
SC002G
Akumulatorski sekač
za čelične šipke



40 V max XGT
SC001G
Akumulatorski sekač
za čelične šipke